


Model CR17335	
System	Manganese dioxide-Li/Organic Electrolyte
Nominal Voltage (V)	3
Nominal Capacity (mAh)*	1750
Nominal Discharge Current (mA)	5
Operating Temperature Range (deg. C)	-40 to +85
Weight (g)**	16
Dimensions (mm)**	
Diameter	17
Height	33.5

Available Terminals and Wire Connectors


Check http://www.maxell.co.jp/e/products/industrial/battery/pdf/cr17335tw_e.pdf for diagrams of batteries with terminals.

Characteristics


● Discharge Characteristics

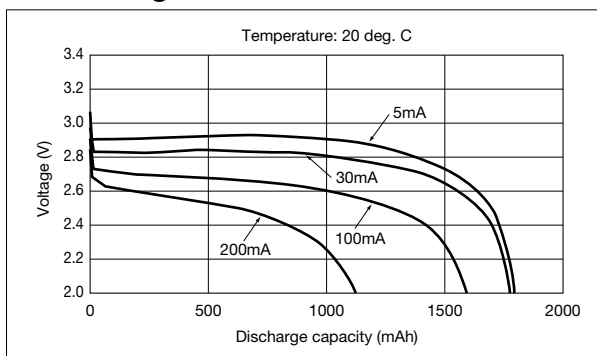


● Temperature Characteristics

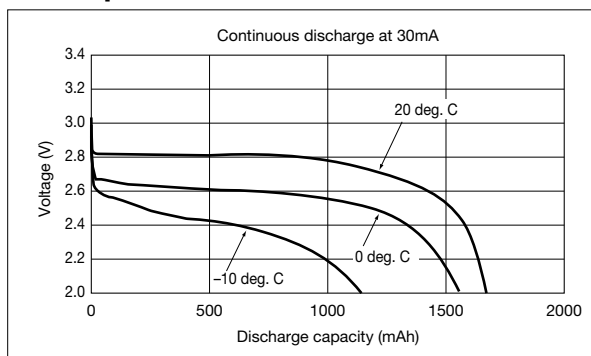

● Pulse Discharge Characteristics

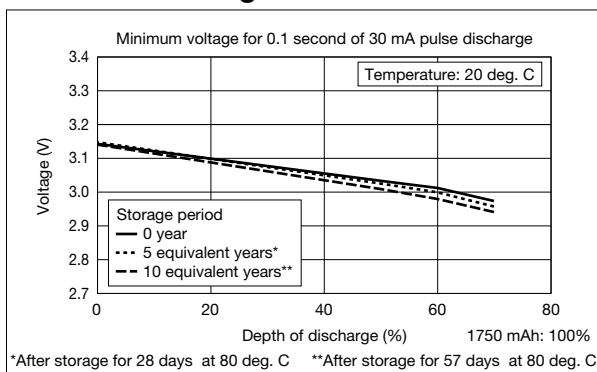

● Storage Characteristics

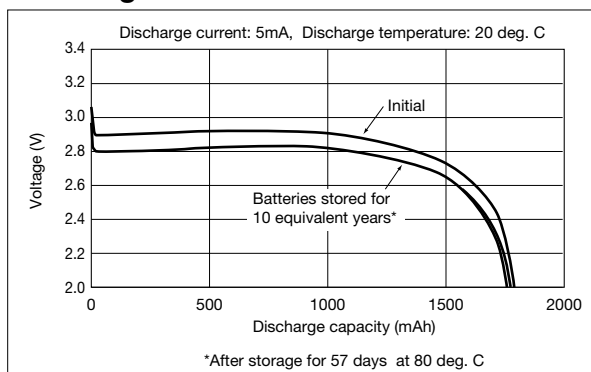

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.

** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.