



<b>Model</b>	CR2450HR-Ex
<b>System</b>	Manganese dioxide-Li/Organic Electrolyte
<b>Nominal Voltage (V)</b>	3
<b>Nominal Capacity (mAh)*</b>	525
<b>Nominal Discharge Current (mA)</b>	0.2
<b>Operating Temperature Ranges (deg. C)</b>	<b>min.</b> <b>max.</b>
	-40          +125 (max. 150)
<b>Acceleration Resistance</b>	Max. 2000G (equivalent to driving at 300km/h)**
<b>Weight (g)***</b>	6.8
<b>Dimensions (mm)***</b>	
<b>Diameter</b>	24.5
<b>Height</b>	5.0

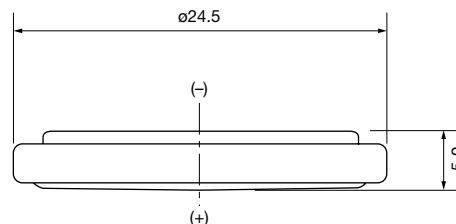


## Characteristics


### ● Discharge Characteristics

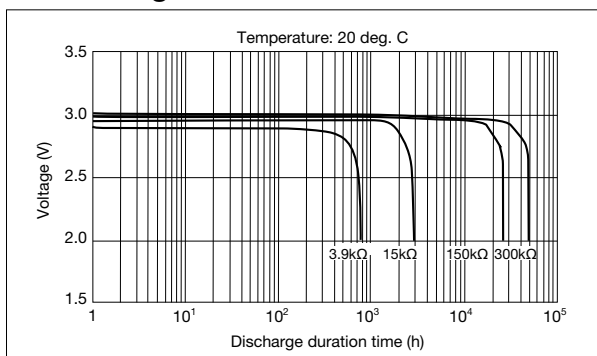


### ● Temperature Characteristics

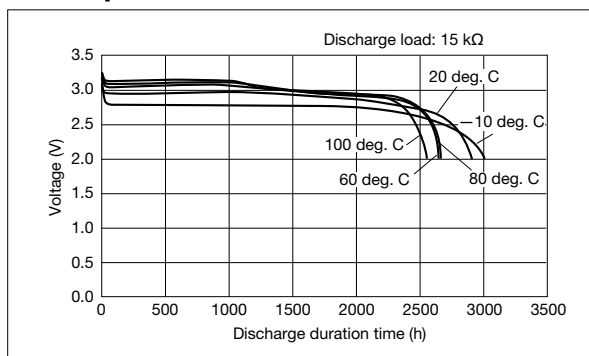

### ● Pulse Discharge Characteristics

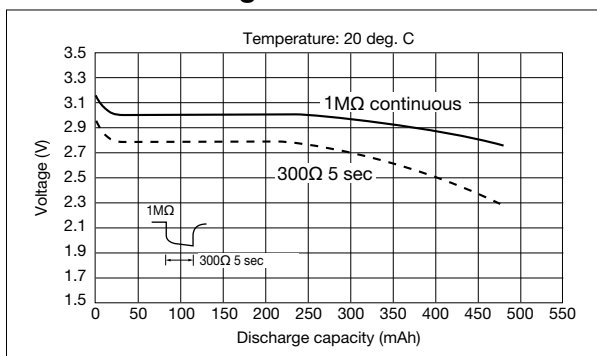

### ● Relationship between Discharge Current and Discharge Capacity

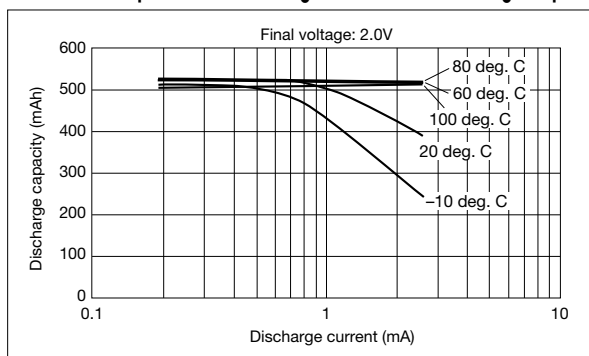

\* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.

\*\* Equivalent to acceleration when driving at 300km/h, when attached to a 17-inch wheel.

\*\*\* Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.